

# Backup Value SOHO Series

Value1200/1500/2200ELCD-AU

VSAUBD0012AU-00

## Solid Power Protection from the Inside Out

**CyberPower®**  
Reliability. Quality. Value.

The Value SOHO Series UPS with GreenPower UPS™ Technology offers home and small office users clean and stable battery backup while the featured RJ11/RJ45 port ensures phone, fax, and modem lines are protected from surges. With Automatic Voltage Regulator (AVR) stabilizes the AC signal and maintains a safe voltage, this allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. The multifunction LCD readout provides immediate access to precise information of critical power/battery condition.

The included PowerPanel® Personal Edition management software showcases the feature-rich abilities such as input/output power voltage readings, self-diagnostics, scheduled-shutdown, and approximate battery backup time. With the Energy-Saving Technology, the Value SOHO Series UPS could improve the operating efficiency and eliminate the waste energy consumption.



### Applications

- Home and Home Office
- Home Theater System
- Small Office
- Medium Business

### Series Features

- GreenPower UPS™ Technology
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- LCD Status Monitor
- USB & Serial Connectivity Ports
- User-Replaceable Batteries
- PowerPanel® Personal Edition Software

Energy-Saving


AVR

Surge Protection


Phone Line Protection

LCD Display

USB & Serial

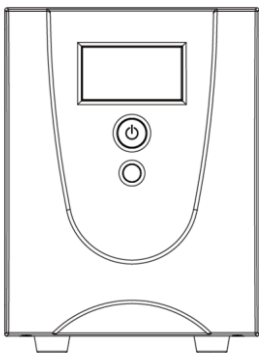

Front

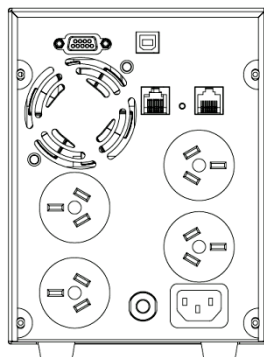

Back



### GreenPower UPS™

#### ENERGY-SAVING TECHNOLOGY

The patented advanced energy-saving technology improves the operating efficiency and eliminates waste energy consumption.

### PowerPanel® Personal Edition Management S/W



#### AUTO-SHUTDOWN SOFTWARE

CyberPower PowerPanel® Personal Edition Management Software, is compatible with Windows7, Vista, XP, 2000 Pro., ME, 98, Windows Server 2008, 2003, Mac and Linux.

# Backup Value SOHO Series

Value1200/1500/2200ELCD-AU




## Technical Specification

| Model                                     | Value1200ELCD-AU   | Value1500ELCD-AU | Value2200ELCD-AU |
|---|--|------------------|------------------|
| Capacity (VA / Watts)                     | 1200 / 720   | 1500 / 900       | 2200 / 1320      |
| Energy-Saving Technology                  | Yes  |                  |                  |
| <b>Input</b>                              |  |                  |                  |
| Frequency Range                           | 47 - 63 Hz (Auto Sensing)  |                  |                  |
| Input Plug Type                           | IEC 320 C14  |                  |                  |
| <b>Output</b>                             |  |                  |                  |
| UPS Outlets (Numbers)                     | (4) AU outlet  |                  |                  |
| On Battery Output Voltage (Typical)       | Simulated Sine Wave at 230Vac +/- 7%   |                  |                  |
| On Battery Output Frequency               | 50Hz/60Hz +/- 1%   |                  |                  |
| Transfer Time (Typical)                   | 4ms  |                  |                  |
| Overload Protection                       | On Utility: Circuit Breaker & Internal Current Limiting<br>On Battery: Internal Current Limiting |                  |                  |
| AVR                                       | Boost & Buck   |                  |                  |
| <b>Surge Protection and Filtering</b>     |  |                  |                  |
| Surge Protection                          | Yes  |                  |                  |
| <b>Physical</b>                           |  |                  |                  |
| Dimensions (HxWxD) (mm)                   | 180 x 140 x 326  |                  |                  |
| Weight(kg)                                | 11.2   | 13.2             | 14.5             |
| <b>Battery</b>                            |  |                  |                  |
| Sealed Maintenance Free Lead Acid Battery | 12V / 7AH x 2  | 12V / 8.5AH x 2  | 12V / 9AH x 2    |
| Typical Recharge Time                     | 8 Hours  |                  |                  |
| <b>Runtimes</b>                           |  |                  |                  |
| Half-load / Full-Load (mins)              | 10 / 3   | 11 / 3           | 8 / 2            |
| <b>Status Indicators</b>                  |  |                  |                  |
| Indicators                                | Power On, Using Battery  |                  |                  |
| Audible Alarms                            | On Battery, Low Battery, Overload  |                  |                  |
| Multi-function LCD Readout                | Yes  |                  |                  |
| <b>Communication</b>                      |  |                  |                  |
| PowerPanel® Personal Edition              | Windows 7 / Vista / XP / 2000, Server 2003 / 2008, Linux   |                  |                  |
| <b>Management</b>                         |  |                  |                  |
| Self Test                                 | Yes  |                  |                  |
| Auto-Charge / Auto-Restart                | Yes  |                  |                  |
| Connectivity Ports                        | USB, Serial  |                  |                  |

#All specifications are subject to change without notice. ©2012 CyberPower Systems. All Trademarks are the property of their owners.

## Packaging Content:

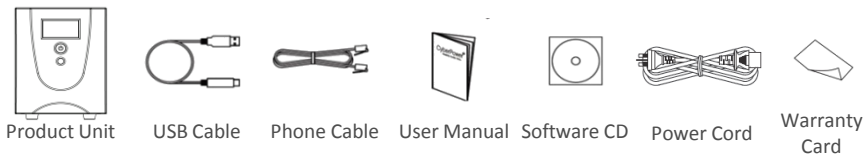

DISTRIBUTED BY:

CyberPower's  
Manufacturing  
Facilities are  
ISO 9001:2000,  
ISO 14000, and  
QC080000  
Approved